KDT3 Multimedia Kiosk
Quick-Start Guide

800.648.4452
www.amltd.com
MADE IN **USA**

05012013

KDT3 Front View

8" LCD Touchscreen

Push Buttons

Push Buttons

Integrated Full Audio Speaker (Left)

Integrated Full Audio Speaker (Right)

Scan Engine Window

© 2013 American Microsystems, Ltd. All rights reserved.

American Microsystems, Ltd. reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult American Microsystems, Ltd. to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of American Microsystems, Ltd. American Microsystems, Ltd. shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material. This document contains proprietary information which is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of American Microsystems, Ltd.

TESTED TO COMPLY WITH FCC STANDARDS

Safety NOM/NYCE-NOM-019-SCFI-1998
Safety of data processing equipment

2190 Regal Parkway
Euless, TX 76040
800.648.4452
www.amltd.com
www.barcodepower.com

KDT3 Back View

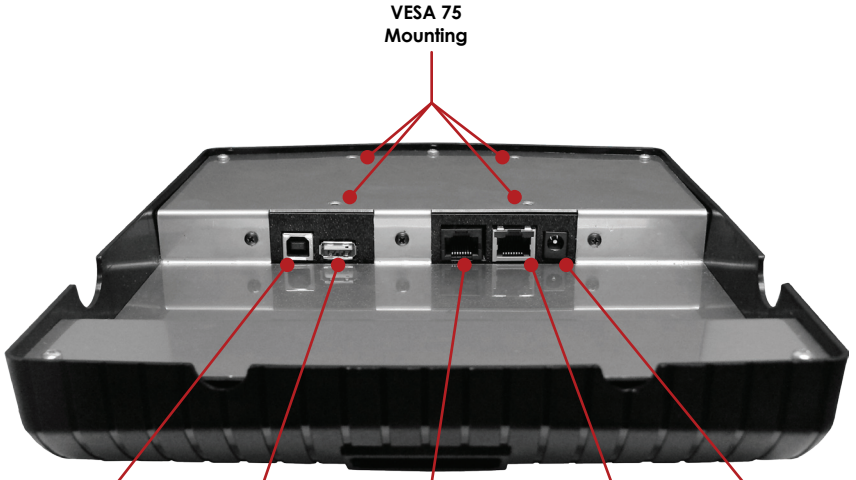

VESA 75 Mounting

USB Host

USB Slave

RS-232 (RJ45)

Ethernet / PoE

+12V DC

VESA 75 Mounting

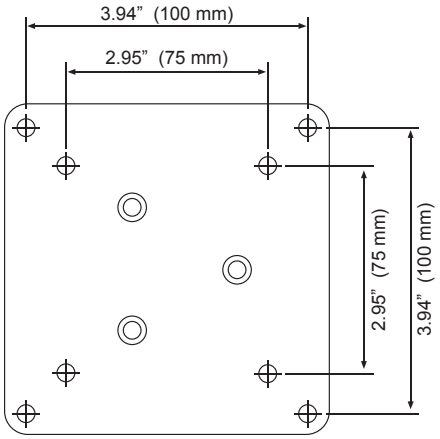

The KDT3 includes the VESA 75 standard for mounting. The four mounting holes are centered left-to-right on the upper portion of the back panel. These holes are exactly 75mm x 75mm on center and accept the standard 4mm screw.

Accessories

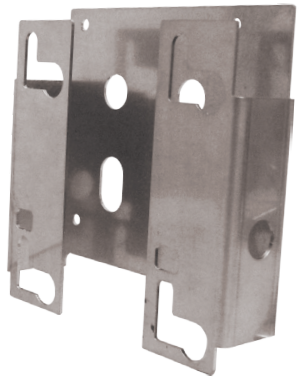

ACC-0780 Quick-Mount Bracket
The ACC-0780 quick-mount bracket is designed for fast, easy mounting and removal on a wall.

PWR-8050 Power Supply, 12VDC, 2.5 A
The PWR-8050 is a power supply alternative to the standard Power-over-Ethernet.

What You Need to Know About the KDT3

The KDT3 can utilize two power sources: An external DC power supply or Power-over-Ethernet.

External Power Supply, 12VDC, 2.5A

WARNING: Using power supplies that are not supplied by AML for use with the KDT3 unit can cause damage to the unit and will void all warranties.

Internal Power-over-Ethernet Supply

The KDT3 contains an 802.3af compatible power supply. The unit can be powered via category 5 networking cable when used with an 802.3af compatible power injector. Both network traffic and power can be sent via the same category 5 wire.

WARNING: Do not move, rename or delete root directory files on the SD card!

Support

Learn More About the KDT3 at:

www.amltd.com/kdt3
or
www.amlkiosks.com/kiosks/kdt3

AML TECHNICAL SUPPORT TEAM

Warranty Agreements

SVC-EWKDT3	Extended Warranty, 3 year, KDT3
SVC-EWPKDT3	Extended Warranty PLUS, 3 year, KDT3