




AutoSeal® 2300 Series

PRODUCTION PRESSURE SEALERS

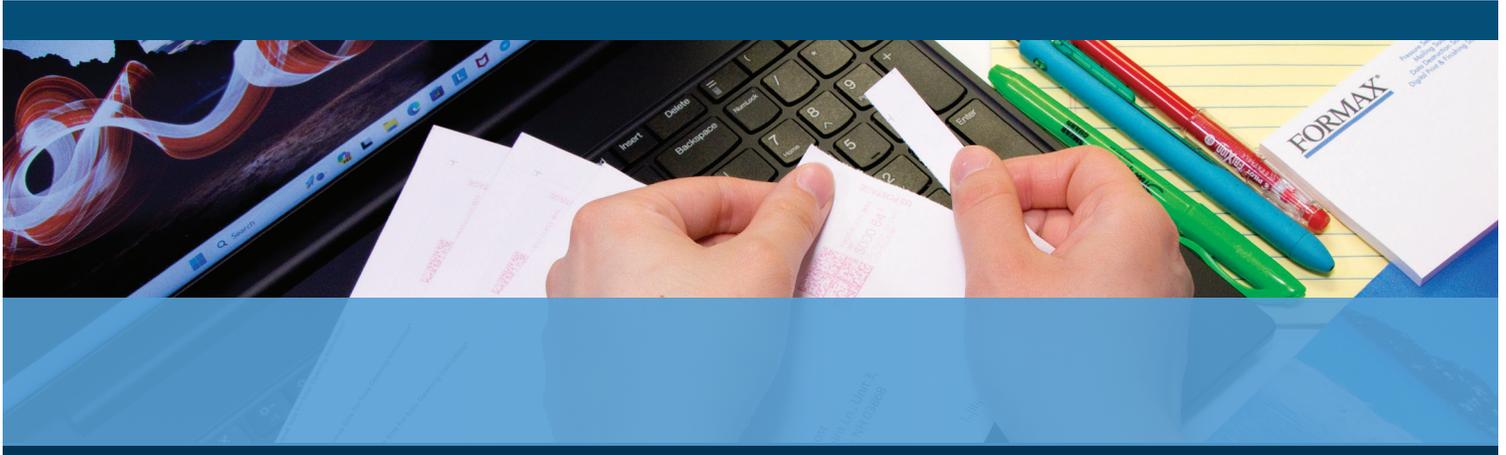

FD 2350 with pile feed system

- High-speed production processing
- Three models available
- Process up to 40,000 forms per hour
- Unlimited monthly duty cycle
- Automatic fold setting adjustments

FORMAX®

www.formax.com

Local Dealer:

The **AutoSeal® 2300 Series Production Pressure Sealers** are designed to process high-volume jobs up to 40,000 forms per hour, with an **unlimited monthly duty cycle**. Using the graphics-based **color touchscreen**, operators can program **up to 200 custom jobs**, and process **forms up to 11.5" wide and 25" long**. Three models are available, with specific infeed options: the **FD 2300 Air Feed System** with a capacity of up to 500 forms, **FD 2300-EXT Extended Air Feed System** for up to 2,500 forms, and the **FD 2350 Pile-Loader Infeed** for up to 3,500 forms. **Fully automated settings** include the feeder, alignment rails, fold plate stops, deflectors and fold rollers, and delivery rollers. Standard features include an **extendable output conveyor**, **safety interlocks**, **jam detection**, **addition/batch counter**, and **static eliminator**. Options include the V-Stack36i Vertical Stacker.



FD 2300 Air Feed
Infeed holds up to 500 forms




FD 2300-EXT Air Feed
Extended infeed holds up to 2,500 forms



FD 2350 Pile Loader
High-capacity elevating deck holds up to 3,500 forms



Color Touchscreen
Graphics-based and designed for easy walk-up use

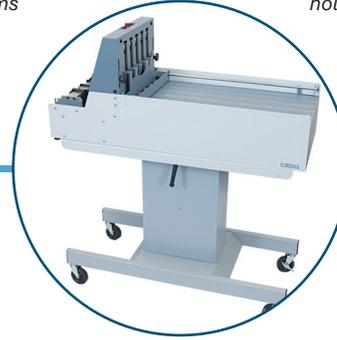

Optional V-Stack36i Stacker
Vertically stacks up to 22" of folded documents, for easy unloading

STANDARD FEATURES

- Three models available
- Processes up to 40,000 forms per hour
- Color touchscreen control panel
- Handles forms up to 11.5" wide x 25" long
- Fully automated settings
- Pre-programmed with 20 standard folds
- Stores up to 200 custom jobs
- Addition and batch counters
- Output conveyor adjusts from 28-42"
- Safety interlocks
- Rugged combination rollers
- Insulated fold plates for noise reduction
- Jam detection
- Static eliminator

OPTIONS

- V-Stack36i Vertical Output Stacker
- 402 Series Jogger

SPECIAL NOTES

Customer-supplied fork lift is required for installation and setup

* Capacity of up to 3,500 non-windowed forms. Forms with a traditional patch window are better suited for the FD 2300 and FD 2300-EXT.

** Three phase power is required.
NOTE: The FD 2300-EXT model requires both a 3-phase 220V outlet and a second separate 220V outlet (single phase) for the extended airfeed deck.

SPECIFICATIONS

Hopper Capacity (right-to-left operation)	FD 2300: up to 500 forms FD 2300-EXT: up to 2,500 forms FD 2350: up to 3,500 forms*
Variable Speed	Up to 40,000 sheets per hour
Usage	High-volume production
Form size	FD 2300/2350: Up to 11.5" W x 25" L (292 x 635cm) FD 2300-EXT: Up to 11.5" W x 14" L (292 x 356cm)
Dimensions	FD 2300/2350: 152" L x 30" W x 56" H (386 x 76 x 142cm) FD 2300-EXT: 167" L x 30" W x 56" H (425 x 76 x 142cm)
Weight	Approximately 1,200 lbs (544kg)
Power	208V, three phase, 20A** Special 3-Phase power required
Power Plug	NEMA L21-20P plug included, NEMA L21-20R receptacle required