


## RRS-8 SPLICER SERIES

The RRS-8 Splicer Series provides an ideal solution for splicing together rolls of labels. These turnkey systems provide the ability to precisely splice one roll of labels together with another in order to make a single larger roll without any evidence of the splice taking place. The RRS-8 Splicer Series also provides the ability to count labels and re-tension rolls.

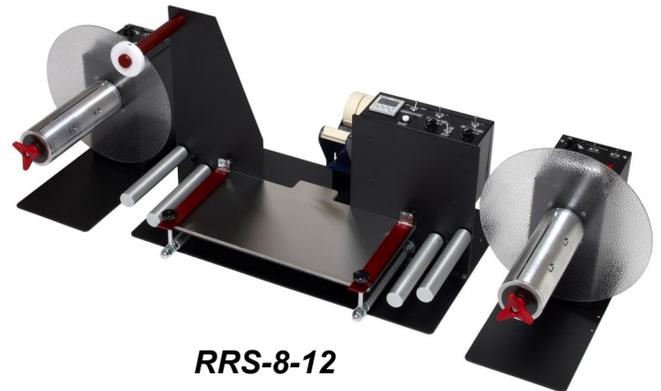

**RRS-8-12**

Technical Specifications	RRS-8-12	RRS-8-16
Max Media Width (in)	8 (203-mm)	
Min Media Width (in)	0.5 (12-mm)	
Max Label Length (in)	N/A	
Min Label Length (in)	N/A	
Max Roll Weight (lbs)	20 (9-kg)	
Max Roll Diameter (in)	12 (305-mm)	16 (406-mm)
Core Diameter (in)	3 (76-mm)	
Label Types	Opaque / Transparent / Gapped / Gapless	
Max Speed (ips)	304 (7722-mm)	320 (8128-mm)
Min Speed (ips)	0.5 (12-mm)	
Max RPM	485	
Max Torque (in-oz)	228	
Number of Flanges <sup>1</sup>	4	
Dimensions-HWD (in)	16 x 55 x 15 (406 x 1397 x 381-mm)	16 x 63 x 15 (406 x 1600 x 381-mm)
Weight (lbs) <sup>2</sup>	114 (51-kg)	118 (53.5-kg)
Power Specifications <sup>3</sup>	100-240VAC in, 24VDC 100W out	
Warranty	3 year limited warranty on Splicing System - 1 year limited warranty on Counter Module & Power Adaptor	

1. Two Guide Flanges are included with each of the two Rewinders in the system.

2. Specified weight is for the entire three-piece system.

3. Input Voltage requirement specified at time of order.