



Series: ANTENNA

Page 1 of 5

#### **RADOME OMNI- OMNIDIRECTIONAL**

2300-2700 MHz

# **RO25002NF**

[25.7] σ1.01 **UV PROTECTED** CAP GRAY-**EPOXY** BONDED **UV PROTECTED** POLYESTER/FIBERGLASS [ 130] 5.12 **RADOME** R025002NF 2300-2700 MHz **GRAY** 2 dBi (N-Female) **EPOXY BONDED PRODUCT** LABEL [18.5] N-FEMALE CONNECTOR 25 98 13.51 53 **FLATS** 

All dimensions are in inches [mm]

Issue: 1523

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden







Page 2 of 5

#### **RADOME OMNI- OMNIDIRECTIONAL**

# **RO25002NF**

2300-2700 MHz

Series: ANTENNA

#### **ELECTRICAL SPECIFICATIONS**

Antenna type Dipole (All electrical performance measured "in free space")

Frequency 2300-2700 MHz

Nominal Impedance 50  $\Omega$ 

VSWR 2:1 Max

Peak Gain 2 dBi

Efficiency 85 %

HPBW / Horizontal Plane Omni

HPBW / Vertical Plane 70 ° TYP

Polarization: Vertical

Power withstanding 50 W

PIM at 2x20 watts -155 dBc

E.S.D. Protection DC Grounded

Connector type N Female

#### **MECHANICAL SPECIFICATIONS**

Plastic radome Pultruded polyester/fiberglass – UV protected

Color White

Ingress Protection IP67

Weight 100 g

Wind-loading 150 mph

Overall length 5.12 INCHES

Side loading @ 1 ft 30 Lbs

Pull off 100 Lbs

#### **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature -40/+85 ° C

Temperature Cyclic -40°C dwell 6 hours/+65°C dwell 6 hours, 4 full cycles

Leak test Fully submerged 12", 12 hours

Issue: 1523

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION









Page 3 of 5

#### **RADOME OMNI- OMNIDIRECTIONAL**


# **RO25002NF**

2300-2700 MHz


Series: ANTENNA

# **Charts**

#### Horizontal plane

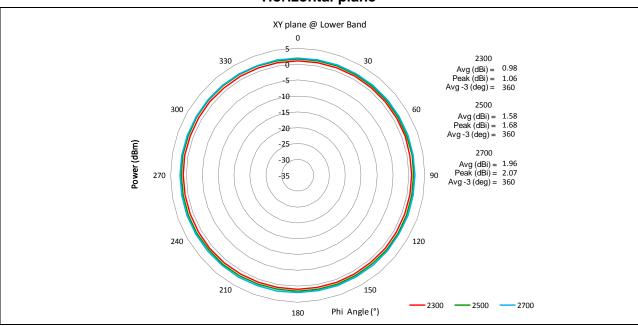

### Vertical plane

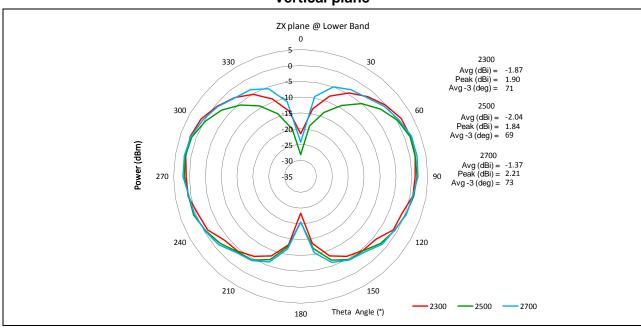

Issue: 1523

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden







Page 4 of 5


#### **RADOME OMNI- OMNIDIRECTIONAL**

#### 2300-2700 MHz


# **RO25002NF**

Series: ANTENNA

#### **VSWR**

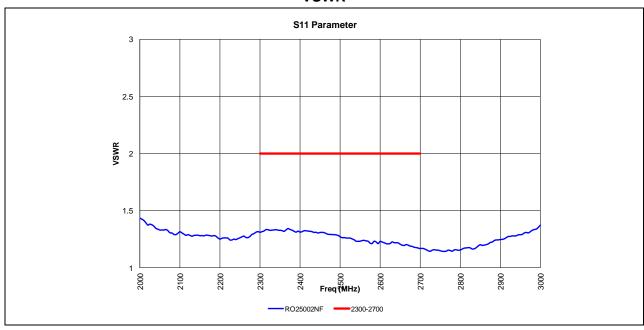

#### Gain

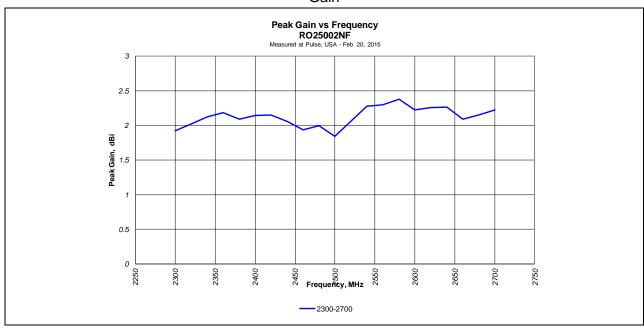

Issue: 1523

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden







Page 5 of 5


#### **RADOME OMNI- OMNIDIRECTIONAL**

2300-2700 MHz

Series: ANTENNA

**RO25002NF** 

#### Efficiency

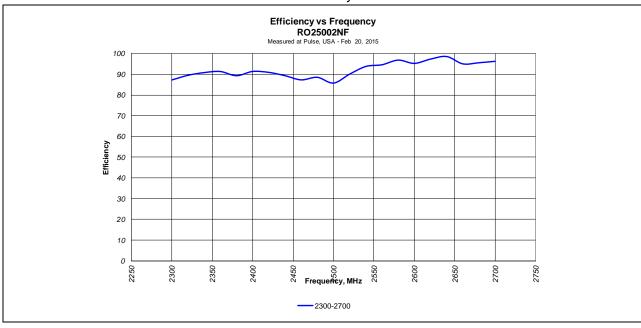

Issue: 1523

