



## RGPS-MM-16-SSM-001 *PS/GLONASS/QZSS/ Galileo Antenna*

The RGPS-MM-16-SSM-001 has a wide range of features including:




- 1575-1606 MHz
- Magnetic/Adhesive Mount
- Pre-Filter
- Voltage 1.5 - 3.6 V
- Ground Plane Independent
- Customizable Cable and Connector
- Dimensions 41 x 34 x 13.5/14.5 mm
- Certificate IP67

## SPECS AND ELECTRICAL DATA


Standard	GPS/QZSS/ Galileo	GLONASS
Band (MHz)	1575	1602
Frequency(MHz)	1575.42	1598-1606
Patch Size (mm)	25 x 25 x 4	
Return Loss (dB)	<=-15.0 dB	
VSWR	<=1.4:1 dB	
Impedance	50	
Radiation Pattern	Hemispherical	
Polarization	RHCP	
Saw Filter	Pre-Filter	
Active Gain (dB)	28 @ 2.7 V	
Noise Figure (dB)	1.5 Typ	
Voltage (V)	1.5 - 3.6	
Current (mA)	9 Typ	
Power Consumption (mW)	24.3 Typ	
ESD Protection	2 kV	
Connector Type	SMA-Male Standard (Other Connectors Available)	
Cable Length	300 cm Standard (Any Cable Length Available)	
Cable Type	RG174 Standard (Other Cables Available)	

## MECHANICAL AND ENVIRONMENTAL

Specifications	RGPS-MM
Mounting Type	Magnetic/Adhesive Mount
Dimensions (mm)	41 x 34 x 13.5/14.5
Radome Type	ABS
Radome Color	Black
Antenna Base	ABS
Operating Temperature (C)	-40 to +85
Storage Temperature (C)	-40 to +85
Certificate	IP67
Substance Compliance	RoHS

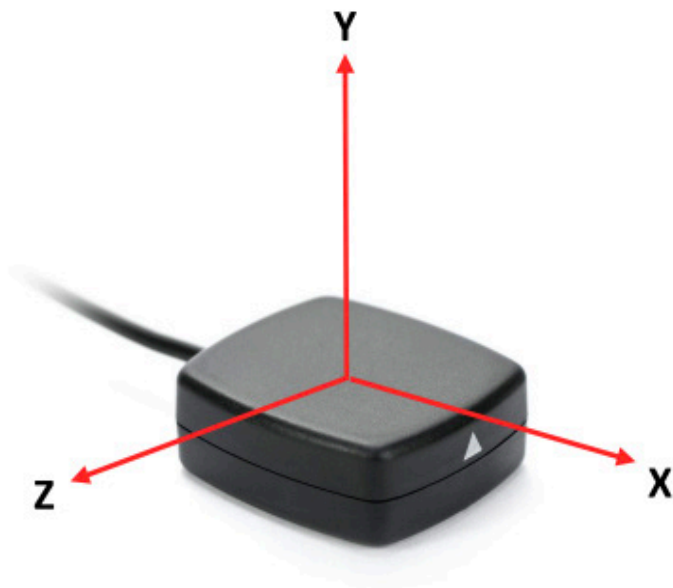

Radiation pattern reference

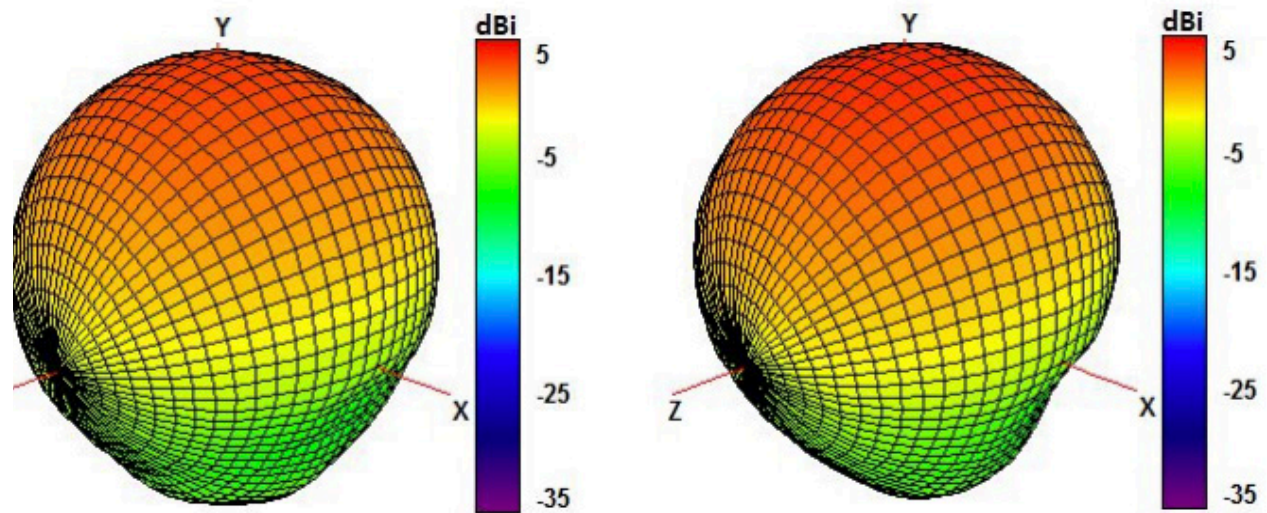

1575 MHz and 1600 MHz Radiation pattern

