

CIRCULAR POLARISED GROUND ANTENNA SlimLine - A6590C

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organisations to transform processes & reduce costs.

Our SlimLine range of antennas are unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form.

Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

Times-7 29 Railway Avenue Lower Hutt 5010 New Zealand P: +64 4 569 1500

APAC


P: +64 4 974 6566

AMERICAS

P: +1 408 769 5025

E: info@times-7.com

www.times-7.com

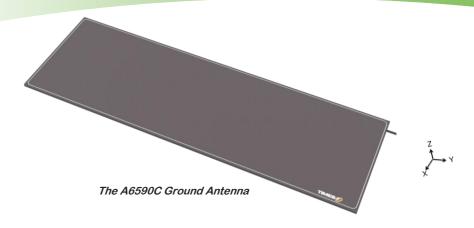

Part of Times-7's exclusively unique range of ground antennas the A6590C is optimised for RFID deployments involving moving products, assets and people. From conference attendee & people tracking, retail presence aware / loyalty marketing & race timing, the A6590C is ideal for applications where traditional side antennas are unsuitable or not optimised for the application.

At just 8 mm / 0.3 in. thick, the durable, high performance A6590C is uniquely capable of lying flat on the ground within a doorway sized footprint, and can withstand payloads of over 200 kg (440 lbs.).

Ultra-low profile circularly polarised UHF ground antenna

Just 8 mm / o.3 in. thick

Powerful 9 dBic gain

Typical applications:

Conference attendee & people tracking,
retail marketing,
race & event timing

Specifications

Physical / Environmental Specifications

Dimensions (LxWxD):	915 mm x 305 mm x 8 mm	
	3 ft. x 1 ft. x 0.3 in.	
Weight:	2 kg / 4.4 lbs.	
Radome Material:	Fire retardant Kydex	
Environmental Rating:	IP65	
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C	
	-4° to +131°F / -22° to +149°F	
Connector type / position:	SMA female side fly lead (300 mm / 1 ft.) or 6ft /	
	2m cable to RP-TNC Plug	

Electrical Specifications


Frequency Range:	865 – 867 MHz / 902 – 928 MHz
Polarisation:	Circular
Far-field Gain:	9dBic
Far-field 3dB beamwidth:	80° in XZ, 20° in YZ
Typical VSWR across frequency range:	< 1.4:1
Front to back ratio:	24dB
Axial Ratio:	ETSI: 3dB (typ) at boresight
	FCC: 2dB (typ) at boresight
Nominal Impedance:	50 Ω
Anti-static protection:	Yes
Maximum Input Power:	6 W






CIRCULAR POLARISED GROUND ANTENNA SlimLine - A6590C

E-field elevation & Azimuth Patterns





XZ-plane

YZ-plane

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A6590C	ETSI 865-867 MHz	71324
A6590C	FCC 902-928 MHz	71325
A6590C 6ft / 2m cable to RP-TNC Plug	ETSI 865-867 MHz	71799
A6590C 6ft / 2m cable to RP-TNC Plug	FCC 902-928 MHz	71749

Applications

- Conference Attendee / People Tracking
- Retail Presence Aware / Loyalty Based Marketing
- Race & Event Timing







The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.



Constantly increasing market reach and influence in the global RFID industry, Times-7's international support spans The Americas, Europe, and Asia Pacific regions through our distributor, authorized reseller and integrated solutions provider network.



Times-7, and the stylized T-7 Antennas logo are trademarks or registered trademarks of Times-7 Research Ltd. All other trademarks are the property of their respective owners.

© 2013 Times-7 Research Ltd. All rights reserved. Specifications are subject to change without notice.