

Large Weatherproof RFID Reader Enclosure Integrated wiring and IP-66 Rated - 20" x 16" x 8"





Ordering Info:

Part # PCE20168-R420

RFMAX

www.rfmax.us

Distributed internationally by: Arcadian, Inc. 11 Muller Place Little Falls, New Jersey, 07424 USA

888.925.5967 toll-free 973.890.2324 international www.arcadianinc.com

For Impinj Speedway Revolution R420 RFID Readers

RFMAX Weatherproof IP-66 Rated RFID Reader Enclosure features high quality construction for wall or mast mounting of the Impini Speedway Revolution RFID readers in harsh industrial environments or outdoor applications. Features integral wiring and RPTNC or N-type female bulkhead connectors, plus one RJ-45 ethernet/ PoE connection and your choice of entry glands. External enclosure is made of extremely durable polycarbonate 2 piece construction, with stainless steel quick-release latches and integrated polyurethane gasket to seal out the elements.

- Molded polycarbonate industrial enclosure
- Stainless steel quick release latches with padlock hasps
- Includes (4) internal coax jumper cables, PoE surge suppressor, Ethernet patch cable, gland(s) and brass mounting lug
- Polyurethane gasket seals out the elements
 - Includes pre-configured aluminum mounting plate and wall mount tabs
- Also available with RFID reader pre-installed Please call for details


Ports:

Enclosure Material: Enclosure Color: Weight: Outside Dimensions (max):

Inside Dimensions (usable):

Flame Rating: RoHS Compliant: Ratings*: (4) RPTNC or N-type Female connectors + (1) RJ-45 Ethernet PoE connector Polycarbonate Light Grey (RAL 7035) 7.5 lbs. (3.4 kg) 16"W x 20"H x 8.75"D (406 x 507x 222 mm) 15.75 x 18.9 x 8.07 inches (355 x 480 x 205 mm) UL 508 Yes NEMA type 4, 4X / IP66



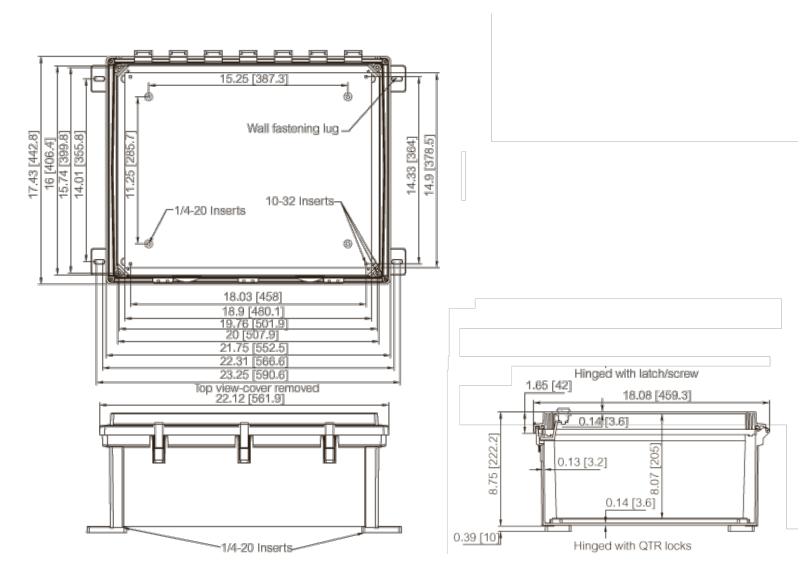

RFMAX

www.rfmax.us

Distributed internationally by: Arcadian, Inc. 11 Muller Place Little Falls, New Jersey, 07424 USA

888.925.5967 toll-free 973.890.2324 international www.arcadianinc.com