

## EOS-200 U8 jewelry tag

Plastic sticker 76x14mm / 2.99x0.55in

# **EOS-200 U8**

Plastic sticker 76x14mm / 2.99x0.55in





### **GENERAL SPECIFICATION**

Market applications	Jewelry
Frequency	860 - 960 MHz
Protocol	EPC Class 1 Gen 2 - ISO 18000-6C
IC	NXP Ucode 8
Format	Plastic sticker
Antenna size	20 x 10 mm (0.79 x 0.39 in)
Finished size	76 x 14 mm (2.99 x 0.55in)

### **MECHANICAL DIMENSIONS**

Antenna size	AxB	20 x 10 mm	0.79 x 0.39 in
Finished size	CxD	76 x 14 mm	2.99 x 0.55 in
Web width	Е	80 mm +/- 1 mm	3.15 in
Pitch	F	18.18 mm +/-0.5 mm	0.72 in
Die-cut to web edge	G	2 mm	0.08 in
Bad mark (optional)	Н	4 mm	0.16 in



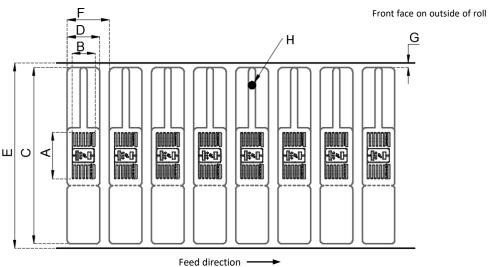

www.tageos.com 1/2



### EOS-200 U8 jewelry tag

Plastic sticker 76x14mm / 2.99x0.55in

### **RFID IC**


IC	NXP Ucode 8
Protocol	EPC Class 1 Gen 2
Operating frequency	860 – 960 MHz
EPC memory	128 bits
User memory	-
Operating temperature	-40°C / +85°C (-40°F / +185°F)

### **MATERIAL CHARACTERISTICS**

Antenna material	Aluminum
Front face material	White TT printable plastic
Adhesive	Solvent-free permanent acrylic adhesive with deadened adhesive on the tail

### TAG READ PERFORMANCE





All the graphs are indicative: performance in real life applications may vary. The data has been determined based on calculations for transmitters with a 2W ERP output power level and an NXP Ucode 8 tag silicon.

#### PACKAGING DETAILS

Product code	2000000043
Delivery format	Roll (single row)
Core inner diameter	76 mm / 3 in
Roll outer diameter	200 mm / 7.87 in
Unwinding direction	Labels on outside of roll
Standard roll size	6 000 pcs
Final inspection	100% tested
Minimum roll yield	99,00 %

Box dimensions	25x25x37 cm / 10x10x14.5 in
Rolls per box	4
Tags/inlays per box	24 000
Box gross weight	6,5 kg / 14,33 lbs
Pallet dimensions	120x80x118 cm / 47,2x31,5x46,5 in
Boxes per pallet	36
Tags/inlays per pallet	864 000
Pallet gross weight	259 kg / 571 lbs

Storage & handling precautions: Observe standard storage and handling practices to minimize Electro Static Discharge. Tageos reserves the right to change its products and services at any time without notice. As our products are used in circumstances beyond our control, we cannot be held liable for any damages caused through their use. This is a general purpose product not designed or intended for any specific application. The pictures and illustrations found on this document are for illustration purposes only, and do not necessarily represent the exact products. Tageos is a registered trademark. All other trademarks are the property of their respective owners.

© 2020 Tageos

Contact us sales@tageos.com www.tageos.com **Tageos HQ** 515 rue Alfred Nobel 34000 Montpellier France Tageos USA 3200 Wake Forest Road Suite 210 Raleigh NC 27609 USA Tageos Hong Kong 42/F Central Plaza 18 Harbour Road Wanchai Hong Kong Updated 03/2020